
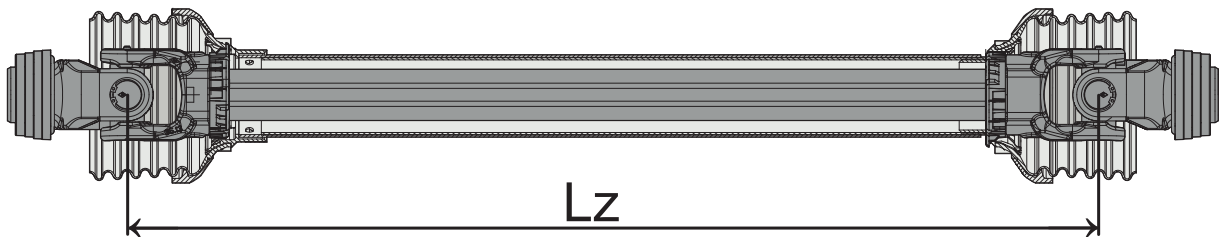


TECHNICAL INFO

Z-SLIDING RING ARRANGEMENT FOR PTO DRIVE SHAFTS WITH PTO DRIVE SHAFT GUARD ST15 AND ST25

Overview of PTO drive shaft lengths L_z that requires the installation of an intermediate bearing.

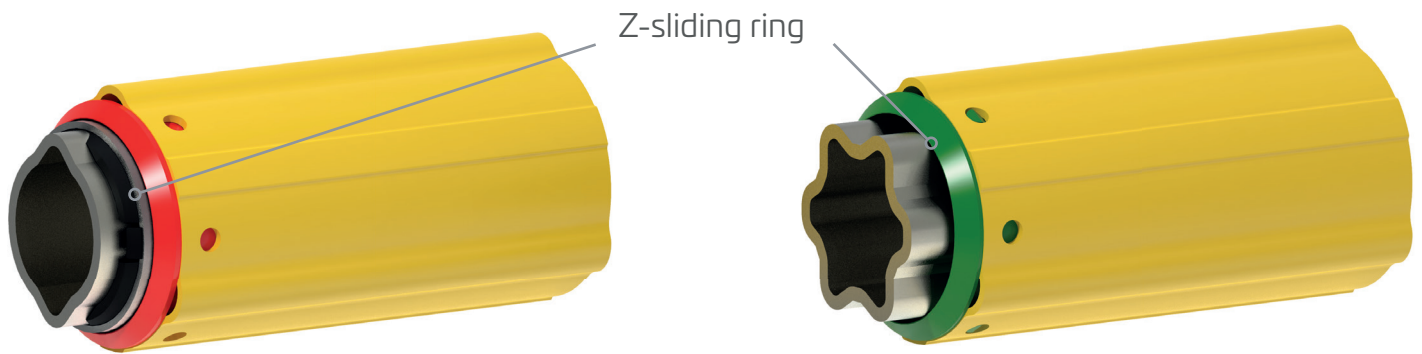

profile type	Z-sliding ring required for ST15		Z-sliding ring required for ST25	
	rotational speed		rotational speed	
	540 min ⁻¹	1000 min ⁻¹	540 min ⁻¹	1000 min ⁻¹
Ov / 1	Lz ≥ 1100 mm	Lz ≥ 900 mm	X	
1b / 2a			Lz ≥ 1000 mm	Lz ≥ 900 mm
S4 / S5	X		Lz ≥ 900 mm	Lz ≥ 800 mm